

M23 产品

描述
Description

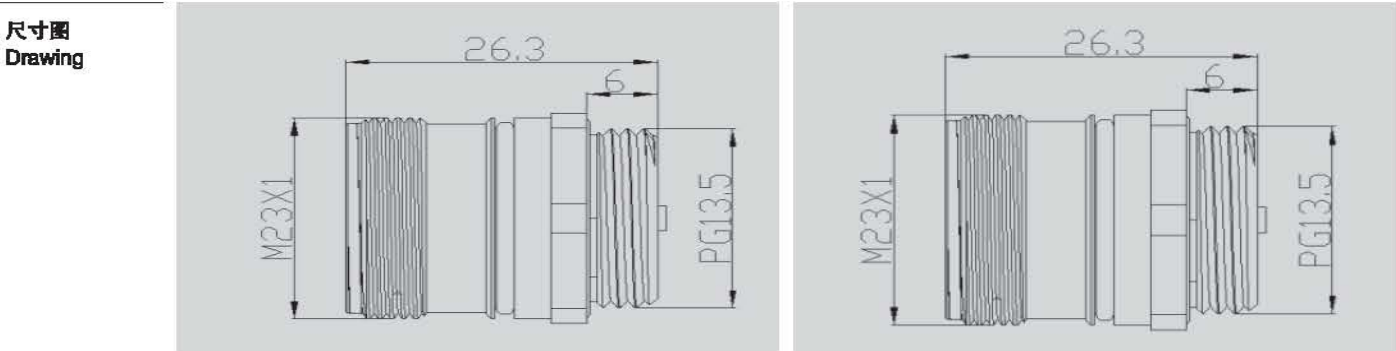
图例
Figure

法兰座，针，中央旋紧，PG 13.5
Male panel mount connector, center fastened, PG 13.5



法兰座，孔，中央旋紧，PG 13.5
Female panel mount connector, center fastened, PG 13.5





订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6	M23-Z0610	6	M23-Z0611
	8	M23-Z0910	8	M23-Z0911
	12	M23-Z1210	12	M23-Z1211
	14	M23-Z1610	14	M23-Z1611
	19	M23-Z1910	19	M23-Z1911

技术参数 Specifications						
针数	6	9	12	16	19	Number of contacts
锁紧方式	螺钉式 / screw					Connector locking system
接线方式	焊接 / solder					Termination
连接截面	2.5mm ² (AWG14)	8×1.0mm ² /1×2.5mm ²	1mm ² (AWG18)	1mm ² (AWG18)	16×1mm ² /3×1.5mm ²	Wire gauge
电缆直径	10mm-13.5mm					Cable outlet
防护等级	IP67					Degree of protection
机械寿命	>500插拔周期 / >500 mating cycles					Mechanical operation
最高工作温度	+130 °C					Upper temperature
最低工作温度	-20° C					Lower temperature
额定电压	32V	160V	180V	125V	63V	Rated voltage
额定冲击电压	1.5KV	2.5KV	2.5KV	2.0KV	1.5KV	Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	III					Overvoltage categorie
绝缘组别	III					Material group
额定电流(40°C)	20 A	10A	7A			Rated current (40 °C)
触点电阻	≤3m Ω					Contact resistance
触点材料	CuZn(黄铜 / brass)					Material of contact
触点电镀材料	Au(金/gold)					Contact plating
插座材料	PA					Material of contact body
外壳材料	CuZn(黄铜镀镍 / brass,nickel plated)					Material of housing

M23 产品

描述
Description

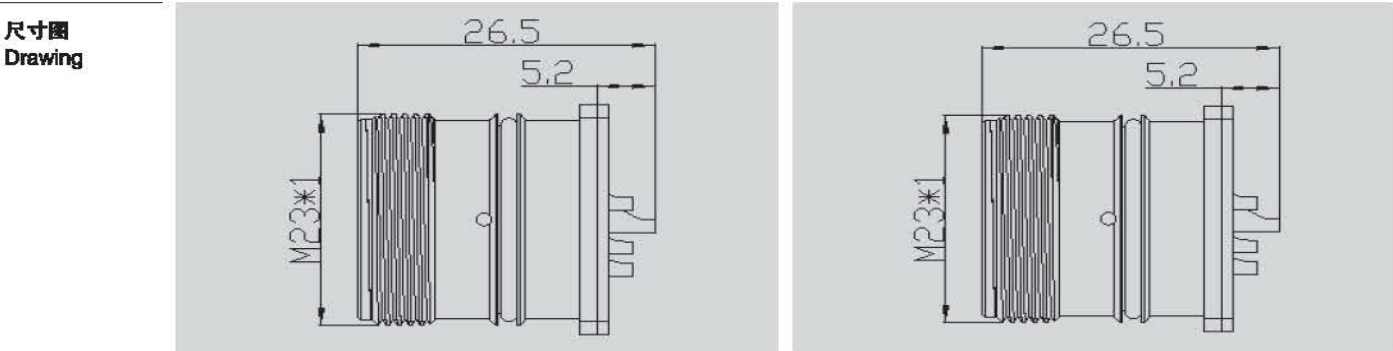
图例
Figure

法兰座，针，正面旋紧
Male panel mount connector, front fastened



法兰座，孔，正面旋紧
Female panel mount connector, front fastened

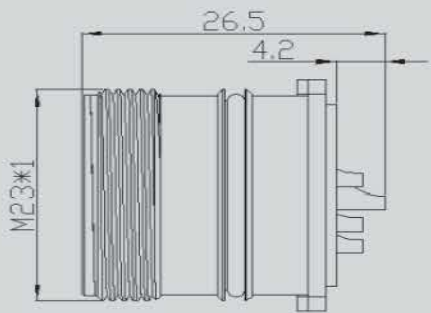
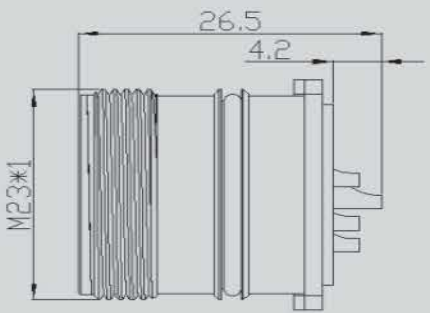




订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6	M23-Z0620	6	M23-Z0621
	8	M23-Z0920	8	M23-Z0921
	12	M23-Z1220	12	M23-Z1221
	14	M23-Z1620	14	M23-Z1621
	19	M23-Z1920	19	M23-Z1921

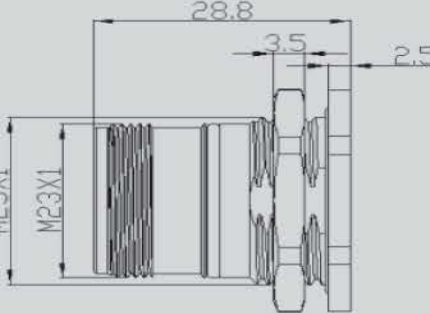
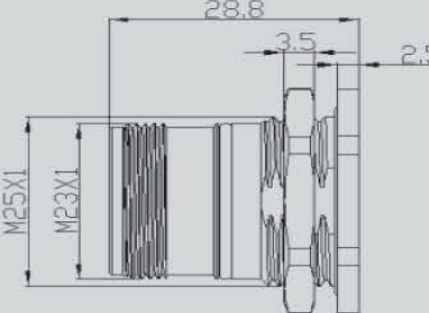
技术参数 Specifications						
针数	6	9	12	16	19	Number of contacts
锁紧方式	螺钉式 / screw					Connector locking system
接线方式	焊接 / solder					Termination
连接截面	2.5 mm ² (AWG 14)	8 x 1.0mm ² / 1 x 2.5mm ²	1 mm ² (AWG18)	1 mm ² (AWG18)	16 x 1 mm ² / 3 x 1.5mm ²	Wire gauge
电缆直径	10mm—13.5mm					Cable outlet
防护等级	IP67					Degree of protection
机械寿命	>500插拔周期 / >500 mating cycles					Mechanical operation
最高工作温度	+130 °C					Upper temperature
最低工作温度	--20° C					Lower temperature
额定电压	32V	160V	160V	125V	63V	Rated voltage
额定冲击电压	1.5KV	2.5KV	2.5KV	2.0KV	1.5KV	Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	III					Overvoltage catagorie
绝缘组别	III					Material group
额定电流(40℃)	20 A	10A	7A			Rated current (40 °C)
触点电阻	≤3m Ω					Contact resistance
触点材料	CuZn(黄铜 / brass)					Material of contact
触点电镀材料	Au(金/gold)					Contact plating
插座材料	PA					Material of contact body
外壳材料	CuZn(黄铜镀镍 / brass,nickel plated)					Material of housing

M23 产品

描述 Description	法兰座，针，反面旋紧 Male panel mount connector,fastened from back side		法兰座，孔，反面旋紧 Female panel mount connector,fastened from back side	
图例 Figure				
尺寸图 Drawing				
订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6	M23-Z0630	6	M23-Z0631
	8	M23-Z0930	8	M23-Z0931
	12	M23-Z1230	12	M23-Z1231
	14	M23-Z1630	14	M23-Z1631
	19	M23-Z1930	19	M23-Z1931

技术参数 Specifications						
针数	6	9	12	16	19	Number of contacts
锁紧方式	螺纹式 / screw					Connector locking system
接线方式	焊接 / solder					Termination
连接截面	2.5 mm ² (AWG 14)	8×1.0mm ² /1×2.5mm ²	1 mm ² (AWG18)	1 mm ² (AWG18)	16×1mm ² /3×1.5mm ²	Wire gauge
电缆直径	10mm-13.5mm					Cable outlet
防护等级	IP67					Degree of protection
机械寿命	>500插拔周期 / >500 mating cycles					Mechanical operation
最高工作温度	+130 °C					Upper temperature
最低工作温度	-20° C					Lower temperature
额定电压	32V	160V	160V	125V	63V	Rated voltage
额定冲击电压	1.5KV	2.5KV	2.5KV	2.0KV	1.5KV	Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	III					Overvoltage categorie
绝缘组别	III					Material group
额定电流(40°C)	20 A	10A	7A			Rated current (40°C)
触点电阻	≤3mΩ					Contact resistance
触点材料	CuZn(黄铜 / brass)					Material of contact
触点电镀材料	Au(金/gold)					Contact plating
插座材料	PA					Material of contact body
外壳材料	CuZn(黄铜镀镍 / brass,nickel plated)					Material of housing

M23 产品

描述 Description	法兰座，针，反面旋紧 Male panel mount connector,fastened from back side		法兰座，孔，反面旋紧 Female panel mount connector,fastened from back side	
图例 Figure				
尺寸图 Drawing				
订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6	M23-Z0640	6	M23-Z0641
	8	M23-Z0940	8	M23-Z0941
	12	M23-Z1240	12	M23-Z1241
	14	M23-Z1640	14	M23-Z1641
	19	M23-Z1940	19	M23-Z1941

技术参数 Specifications						
针数	6	9	12	16	19	Number of contacts
锁紧方式	螺纹式 / screw					Connector locking system
接线方式	焊接 / solder					Termination
连接截面	2.5mm²(AWG 14)	8×1.0mm²/1×2.5mm²	1mm²(AWG18)	1mm²(AWG18)	16×1mm²/3×1.5mm²	Wire gauge
电缆直径	10mm-13.5mm					Cable outlet
防护等级	IP67					Degree of protection
机械寿命	>500插拔周期 / >500 mating cycles					Mechanical operation
最高工作温度	+130 °C					Upper temperature
最低工作温度	-20° C					Lower temperature
额定电压	32V	160V	160V	125V	63V	Rated voltage
额定冲击电压	1.5KV	2.5KV	2.5KV	2.0KV	1.5KV	Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	III					Overvoltage categorie
绝缘组别	III					Material group
额定电流(40° C)	20 A	10A	7A			Rated current (40 °C)
触点电阻	≤3m Ω					Contact realstance
触点材料	CuZn(黄铜 / brass)					Material of contact
触点电镀材料	Au(金/gold)					Contact plating
插座材料	PA					Material of contact body
外壳材料	CuZn(黄铜镀镍 / brass,nickel plated)					Material of housing

M23 产品

描述 Description	法兰座, 针, 压接型, 螺纹连接 Male fastened, crimping, screw thread connection		法兰座, 针, 压接型, 螺纹连接 Male fastened, crimping, screw thread connection	
图例 Figure				
尺寸图 Drawing				
订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6 (5+PE)	M23-ZD06A01	6	
			8 (4+3+PE)	M23-ZD08A01

技术参数 Specifications					
针数	6	8	Number of contacts		
锁紧方式	螺纹式/screw		Connector locking system		
接线方式	压接/crimp		Termination		
连接截面	0.25-4.0mm²	0.06-1.0mm²/0.25-4.0mm²	Wire gauge		
电缆直径	12-16mm		Cable outlet		
防护等级	IP67		Degree of protection		
机械寿命	>500插拔周期/ > 500 mating cycles		Mechanical operation		
最高工作温度	~+125° C		Upper temperature		
最低工作温度	~-40° C		Lower temperature		
额定电压	630V	250V/600V	Rated voltage		
额定冲击电压	6000V	2500V/6000V	Rated impulse voltage		
污染等级	2		Pollution degree		
过电保护等级	II		Overvoltage categorie		
绝缘组别	III		Material group		
额定电流(40° C)	30A	9A/30A	Rated current (40° C)		
触点电阻	≤3mΩ		Contact resistance		
触点材料	CuZn (黄铜/brass)		Material of contact		
触点电镀材料	Au(金/gold)		Contact plating		
插座材料	PA		Material of contact body		
外壳材料	镀锌镍/zinc diecasting nickel plated		Material of housing		

M23 产品

描述 Description	弯角法兰座, 针, 压接型, 螺纹连接 Male Turn the flange seat, crimping, screw thread connection		弯角法兰座, 孔, 压接型, 螺纹连接 Female Turn the flange seat, crimping, screw thread connection	
图例 Figure				
尺寸图 Drawing				
订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.	针数 Contacts	订货号 Ordering-No.
	6	M23-WZ0601	6	M23-WZ0602
	8	M23-WZ0901	8	M23-WZ0902
	12	M23-WZ1201	12	M23-WZ1202
	14	M23-WZ1701	14	M23-WZ1702
	19	M23-WZ1901	19	M23-WZ1902

技术参数 Specifications						
针数	6	9	12	16	19	Number of contacts
锁紧方式	螺纹式 / screw					Connector locking system
接线方式	焊接 / solder					Termination
连接截面	2.5 mm ² (AWG 14)	8 x 1.0mm ² / 1 x 2.5mm ²	1 mm ² (AWG18)	1 mm ² (AWG18)	16 x 1 mm ² / 3 x 1.5mm ²	Wire gauge
电缆直径	10mm-13.5mm					Cable outlet
防护等级	IP67					Degree of protection
机械寿命	>500插拔周期 / >500 mating cycles					Mechanical operation
最高工作温度	+130 °C					Upper temperature
最低工作温度	- -20° C					Lower temperature
额定电压	32V	160V	160V	125V	63V	Rated voltage
额定冲击电压	1.5KV	2.5KV	2.5KV	2.0KV	1.5KV	Rated impulse voltage
污染等级	3					Pollution degree
过电保护等级	III					Overvoltage categorie
绝缘组别	III					Material group
额定电流(40°C)	20 A	10A	7A			Rated current (40 °C)
触点电阻	≤3m Ω					Contact resistance
触点材料	CuZn(黄铜 / brass)					Material of contact
触点电镀材料	Au(金/gold)					Contact plating
插座材料	PA					Material of contact body
外壳材料	CuZn(黄铜镀镍 / brass,nickel plated)					Material of housing